

THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-013277	27AUG2014	DM	DM
	A1	REVISE PER PCN E-19-014486	16SEP2019	JA	DM



SCALE 1:2

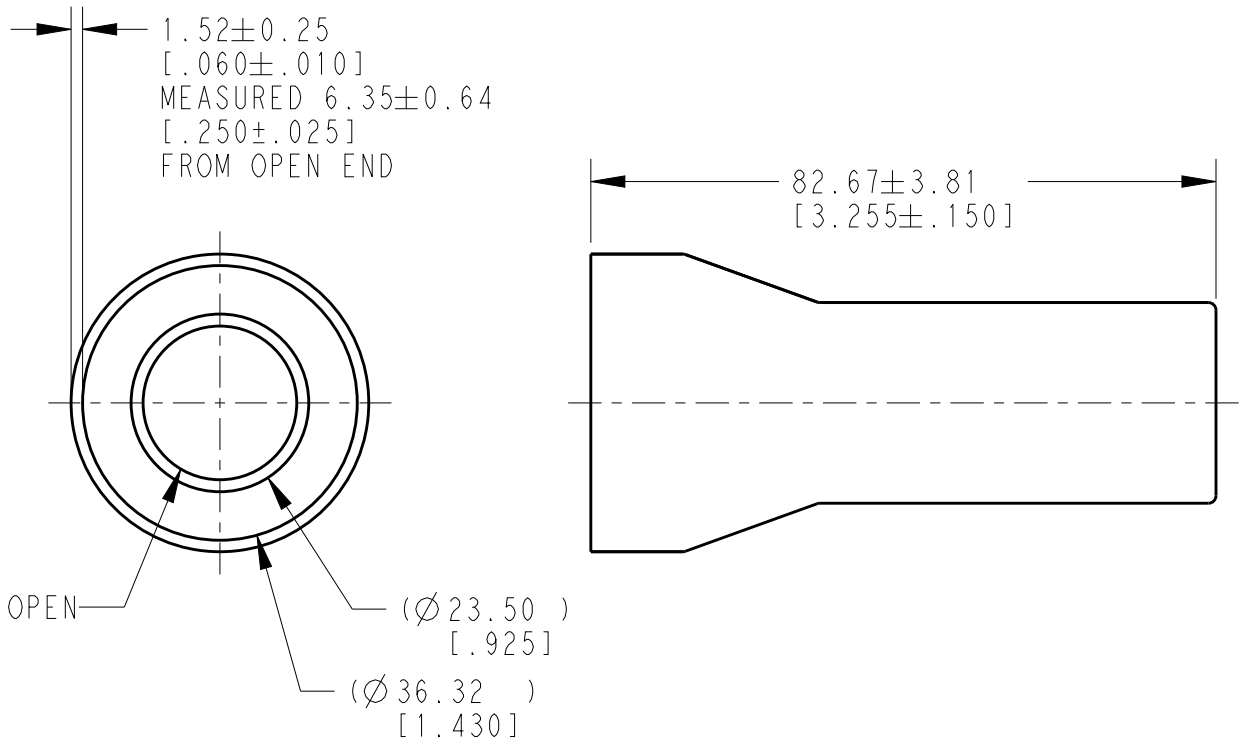

3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F].

1. THIS PART IS USED ON
   HDP24-24-XXX RECEPTACLES
   HDP26-24-XXX PLUGS
   HD34-24-XXX RECEPTACLES
   HD36-24-XXX PLUGS
   WHERE XXX IS PIN ARRANGEMENTS.

NOTES:

TE INTERNAL PN	DEUTSCH PN
HD30-24BT	HD30-24BT

THIS DRAWING IS UNPUBLISHED. © COPYRIGHT 2014 BY TE CONNECTIVITY ALL RIGHTS RESERVED. RELEASED FOR PUBLICATION 2019

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±0.63 [.025]
4 PLC	±
ANGLES	±0° 30′ 0"

DWN	D.MEYER	27AUG2014
CHK	I.GRANTCHAROVA	27AUG2014
APVD	D.MEYER	27AUG2014
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT	11.72g	

MATERIAL: PVC
FINISH: GRAY

TE Connectivity

NAME: BOOT, SIZE 24
HD30/HDP20 SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	4AFU8	C-HD30-24BT	-

CUSTOMER DRAWING

SCALE	SHEET	REV
1:1	1 OF 1	A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

HD30-24BT