RG-Series

SINGLE/DOUBLE POLE ROCKER & PADDLE SWITCHES

The double pole version of the R-Series incorporates the same sleek lines as the original Curvette, in a double pole envelope. Features include silver-plated butt-action contacts which afford ratings to 20A/125, 15A 250VAC and withstand peak inrush currents up to 100 amps. Paddle or rocker actuators and a choice of solder lug, .250 Tab and wire lead terminations enable this switch to adapt to high current applications.









Product Highlights:

- Ratings to 20A
- UL, CSA and VDE approved
- Rocker or Paddle actuators
- Fits Euro or American standard mounting holes

Typical Applications:

- Power Supply
- Appliance
- Exercise Equipment
- Music Equipment

Carling Technologies®
Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Email: sales@carlingtech.com
Application Support: team2@carlingtech.com
Phone: 860.793.9281 **Fax:** 860.793.9231

www.carlingtech.com

Dielectric Strength

UL/CSA:
1000V - live to dead metal parts & opposite polarity
VDE:
4000V - live to dead metal parts;
1250V - opposite polarity & across open contacts

Electrical Life

50,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

-40°F to 185°F (-40°C to 85°C)

RGSCA901 - R - B - B - A

1 Base Part Number | 2 Actuator Style | 3 Actuator Color | 4 Bezel Color | 5 Rocker Legend

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING [1] / TERMINATION

15A 250 VAC, 20A 125 VAC, 3/4 HP 125-250 VAC, 14(6)A 250 VAC

	Solder Lugs	.250 Tabs	Wire Leads
Standard Base			
OFF-NONE-ON (Single Pole)	**RGSCA900**	**RGSCA901**	**RGSCA905**
ON-NONE-ON (Single Pole)	**RGSCB900**	**RGSCB901**	**RGSCB905**
OFF-NONE-ON (Double Pole)	**RGSCC900**	**RGSCC901**	**RGSCC905**
ON-NONE-ON (Double Pole)	**RGSCD900**	**RGSCD901**	**RGSCD905**
European Base (22 x 30 mm cutout)			
OFF-NONE-ON (Single Pole)	**RGSEA900**	**RGSEA901**	**RGSEA905**
ON-NONE-ON (Single Pole)	**RGSEB900**	**RGSEB901**	**RGSEB905**
OFF-NONE-ON (Double Pole)	**RGSEC900**	**RGSEC901**	**RGSEC905**
ON-NONE-ON (Double Pole)	**RGSED900**	**RGSED901**	**RGSED905**

2 ACTUATOR STYLE

P	Paddle	**R**	Rocker

3 ACTUATOR COLOR [1]

B	Black	**W**	White


4 BEZEL COLOR [1]


B	Black	**W**	White


5 ROCKER LEGEND

	hot stamp
NO LEGEND	**0**
OFF-ON vertical	**A**
OFF-ON horizontal	**B**
O-I horizontal	**D**
O-I vertical	**E**
Dual OFF-ON, O-I vertical	**H**
Dual OFF-ON, O-I horizontal	**J**

Notes:
1 Additional ratings, colors and clear style actuators are available. Consult factory.

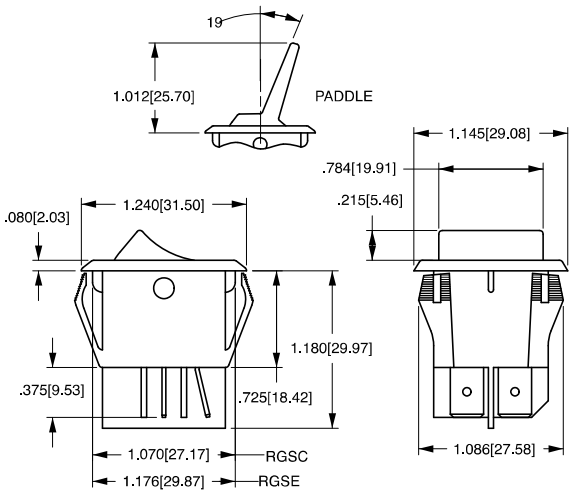

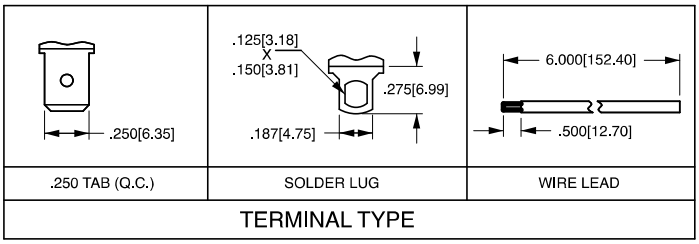

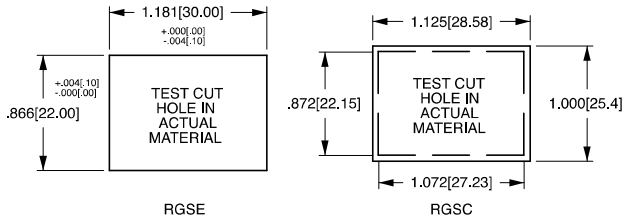

MOUNTING HOLE
Panel Thickness: .025 min - .187 max.
Specific cutout dimension range dependent on panel thickness and material.

*Manufacturer reserves the right to change product specification without prior notice.