Flasher
BG124.2+4.001



TECHNICAL DATASHEET

Features

Highly sensitive and stable electronic timing
Suitable for flasher light during car turning
Wide operating voltage, temperature range, and long life
Standard terminals, usage and replacement easily


CONTENT

Features..... 1
Specifications... 1
Diagrams 2
Dimensions ..... Fehler! Textmarke nicht definiert.


Specifications

Coil Voltage	24V
Test Temperature	20 +/-2°C
Test Voltage	26VDC +/-0,4VDC
Operating Voltage	22VDC – 30 VDC
Switch Power	21W – 150W
Bulb failure warning	>140 times per minute
Flashing Frequency	60 – 120 times per minute
Operating Temperature	-40° - +120°C
Duty Ratio	30% – 70%
Life Time	400 working hours
Terminal Type	Terminal 4x6,3mm

Diagrams

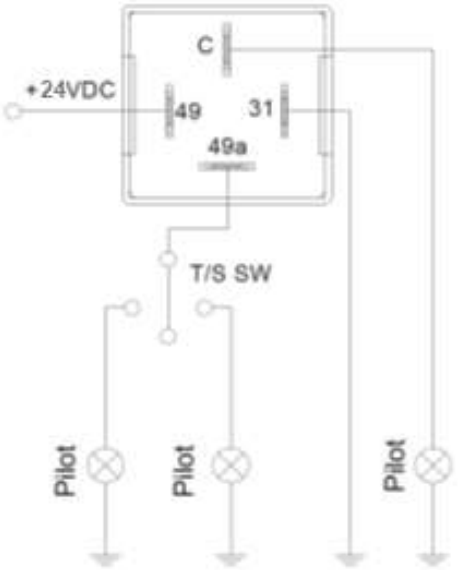

External Dimensions

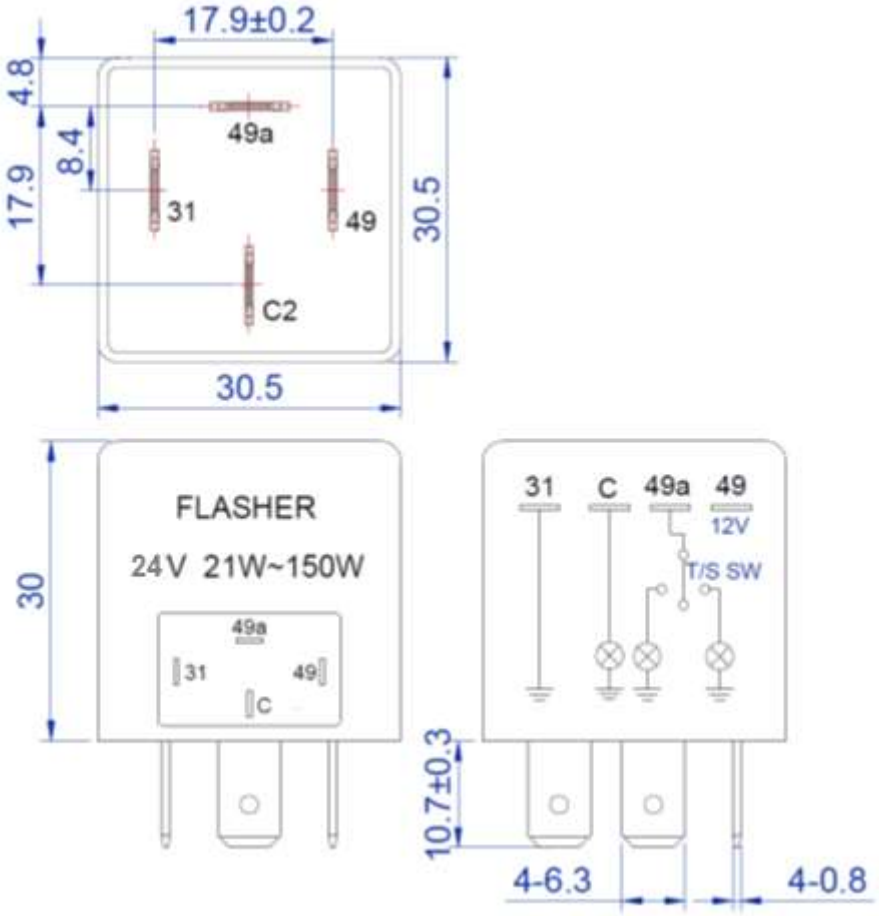

Remark:

(1) In case of no tolerance shown in outline dimension: outline dimensions <=1mm, tolerance should be +/-0,2mm;

Outline dimension >1mm and <=5mm, tolerance should be +/-0,3mm;

Outline dimension >5mm, toleranceshould be +/-0,4mm