
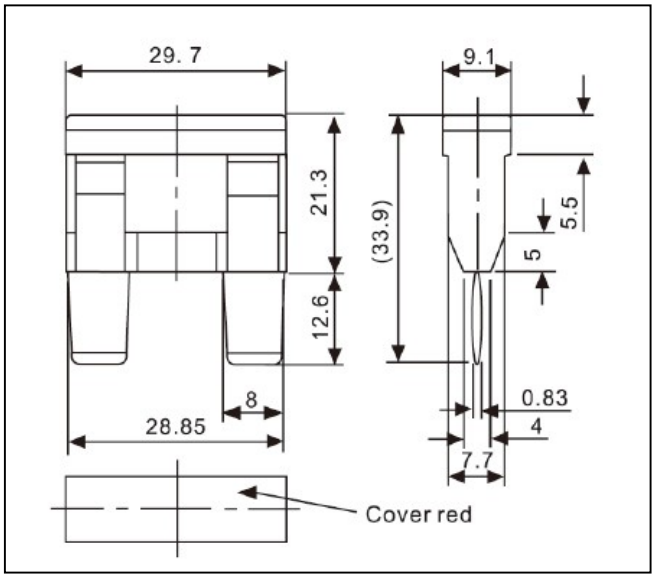



| Ampere Rating | Voltage Rating | tance(± 10%) | Color Marking |
|---|---|---|---|
| 20A | 80V | 4. 50mΩ | Tam |
| 25A | 80V | 3. 00mΩ | Green |
| 30A | 80V | 1. 65mΩ | Tam |
| 40A | 80V | 1.71mΩ | Amber |
| 50A | 80V | 1. 42mΩ | Red |
| 60A | 80V | 1.1mΩ | Blue |
| 70A | 80V | 0.89mΩ | Brown |
| 80A | 80V | 0.64mΩ | White |
| 100A | 80V | 0.45mΩ | Brown |

## Specifications

Breaking force:1000A@80VDC
Voltage Ratting:80VDC
Operating Temp Range:-40℃～125℃
Terminals:Copper tin plating
Housing Material:Nylon
Standards compliant:SAE J2077
ISO 8820
UL248 Special Purpose Fuses

| %ofRating | Opening Time | |
|---|---|---|
| | MINI | MAX |
| 100 | 360, 000s | - / - |
| 135 | - / - | 1,800s |
| 200 | 2s | 60s |
| 350 | 0.20s | 7s |
| 600 | 0.04.0s | 1s |

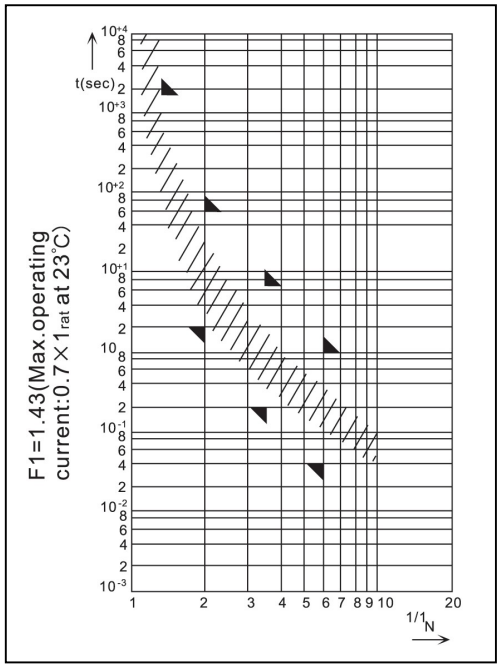

| | | | |
|---|---|---|---|
| Create: | BB | Date: | 25.10.2025 |
| Check: | | Version: | V2 |

maxi Flachsicherung 20 A – 80 Vdc

F8???