Battery Storage Connector

Features:

12 Months Quality Insurance
Sample available for quality test
Touch Proof
360°Rotating Plug
Compactrobust Design
Various Termination Options
Three Color are available
Quick Lock and Press-to- Release Design.



产品参数 Product Parameters


额定电压	Rated Voltage	1000V DC
额定电流	Rated Current	From 60A to 350A MAX
耐电压	Withstand Voltage	2500V AC
绝缘电阻	Insulation Resistance	≥1000MΩ
线径范围	Cable Gauge	10-120mm²
接线方式	Connection Type	Terminal machine
插拔次数	Mating Cycles	>500
防护等级	IP Degree	IP67 (Mated)
工作温度	Operating Temperature	-40℃~+105℃
防火等级	Flammability Rating	UL94 V-0
芯数	Positions	1pin
外壳	Shell	PA66
端子	Contacts	Cooper alloy,Silver plating

RHT • P 006 • C10 • RD


- RD — Color:RD(Red),OG(Orange),BK(Black)
- C10 — Connection Mode of Plug and Socket:
  Plug:C10/C16/C25/C35/C50/C70/C95
  Socket:T01(Busbar Lug)/T02(Outer Screw)/T03(Inner Screw)
- 006 — Terminal Diameter:6/8mm²
- P — P:Plug,S:Socket
- RHT — Brand

产品尺寸 Battery Storage Connector Dimensions

Socket
插座




内螺纹连接 Inner Screw



铜排连接 Busbar Lug




外螺纹连接 Outer Screw

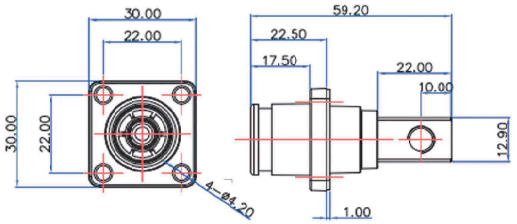

Wire Gauge	Rated Current	A	B
10mm²	60A	5.00	7.00
16mm²	100A	6.20	8.40
25mm²	120A	7.80	10.60
25mm²	120A	7.80	10.20
35mm²	150A	9.00	11.70
50mm²	200A	10.70	13.80
70mm²	250A	13.00	16.30
95mm²	350A	15.00	19.50
More styles are coming soon...			

Plug
插头



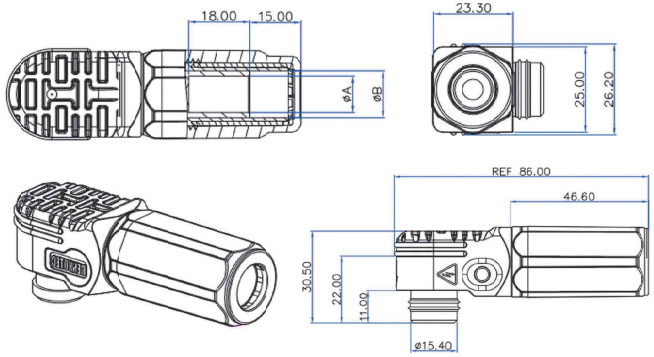

Wire Gauge	Rated Current	A	B
10mm²	60A	5.00	7.00
16mm²	100A	6.20	8.40
25mm²	120A	7.80	10.60
25mm²	120A	7.80	10.20
35mm²	150A	9.00	11.70
50mm²	200A	10.70	13.80
70mm²	250A	13.00	16.30
95mm²	350A	15.00	19.50
More styles are coming soon...			