


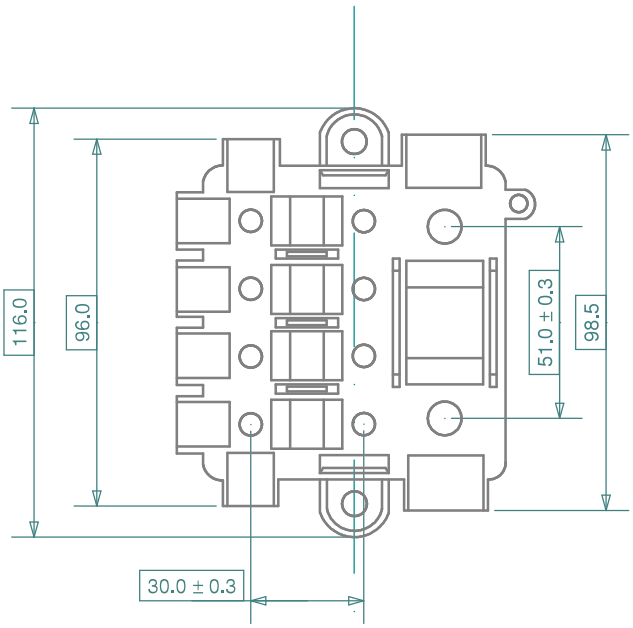


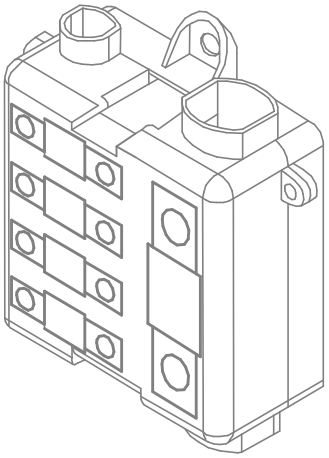

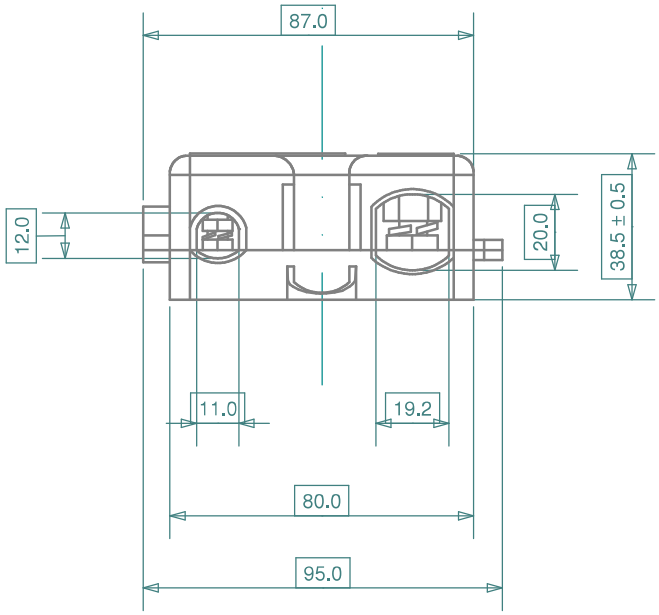


Bussbar configuration (top view)

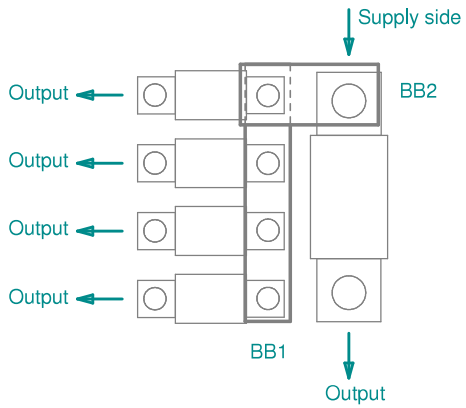


Note: BB2 can be placed on other side of megaOTO fuse, also switching supply and output

Additional information:
Bussbar dimensions: BB1 1.5x12x68mm, BB2 2x16x36.5mm (WxHxL)
Bussbar dimension tolerance: W: ± 0.3mm, H: ± 0.5mm, L: ± 1.0mm
Bussbar material: Copper, Cu
Max fuse rating: 4 x 200A midiOTO, megaOTO not limited
Torque range: midiOTO (M5) 2 - 3 Nm, megaOTO (M8) 7 - 9 Nm

BB1



BB2



Revisions				Date	Appr.		
	Date	Type	Drawn	04/09	AdH		
a	06/10	added cable hole dimensions	Checked	07/11	AdH		
b	02/11	updated dimensions	Standards				
c	07/11	added bussbar tolerances	Approved	07/11	AdH		
			Scale 1 : 2			Title	HMD4-MG1, holder midiOTO, megaOTO
			Projection	Tolerance ± 1 mm unless otherwise noted		Drawing type	schematic
						Drawing number	HMD4-MG1 drawing 1
						Sheet	1 of 1
						Layers / Sheet	0 1 2 3 6 8 9 11 Sheet 01