





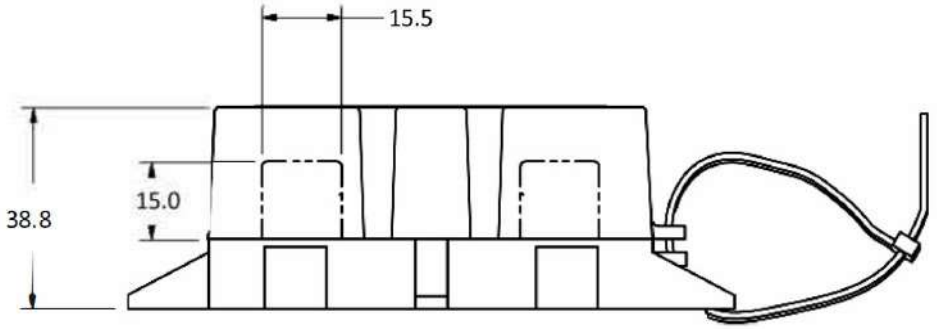

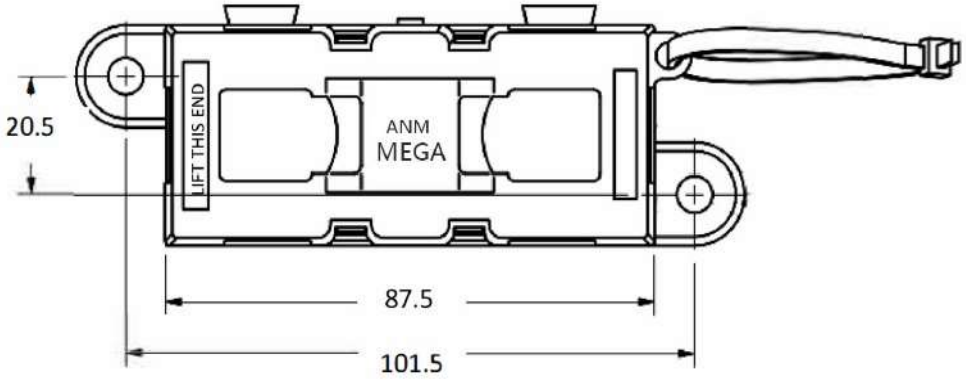

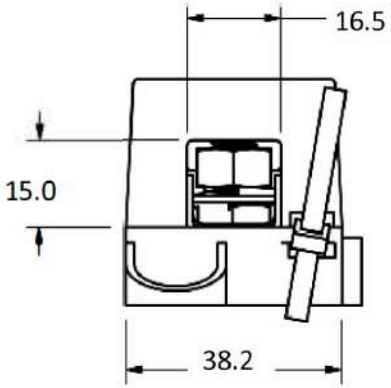

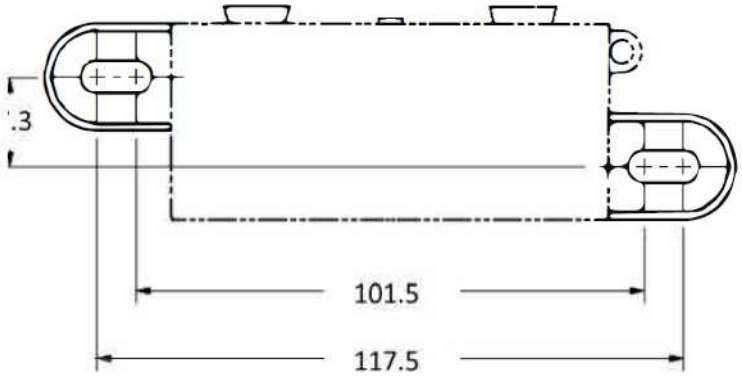

High current auto fuse holder
Apply to ANM car fuses
Rated current : 500A max
Rated voltage : 32V
Material : Nylon+screw-thread steel+nickel plated brass
Install torque : 5NM
Flame rating : UL94V-0
Fixed bolt : 8mm diameter

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERENCE DECIMALS X± 0.5 XX± 0.25 ANGULAR ± 2' DO NOT SCALE DRAWING		CUSTOMER NO.	
		DRAWN BY	TITLE: Fuse holder
		CHECKED BY	
		APPROVED BY	
P/N		DATE 2007/11/12	PART NO. HMG2
REV	A	SCALE	DRAWING NO.