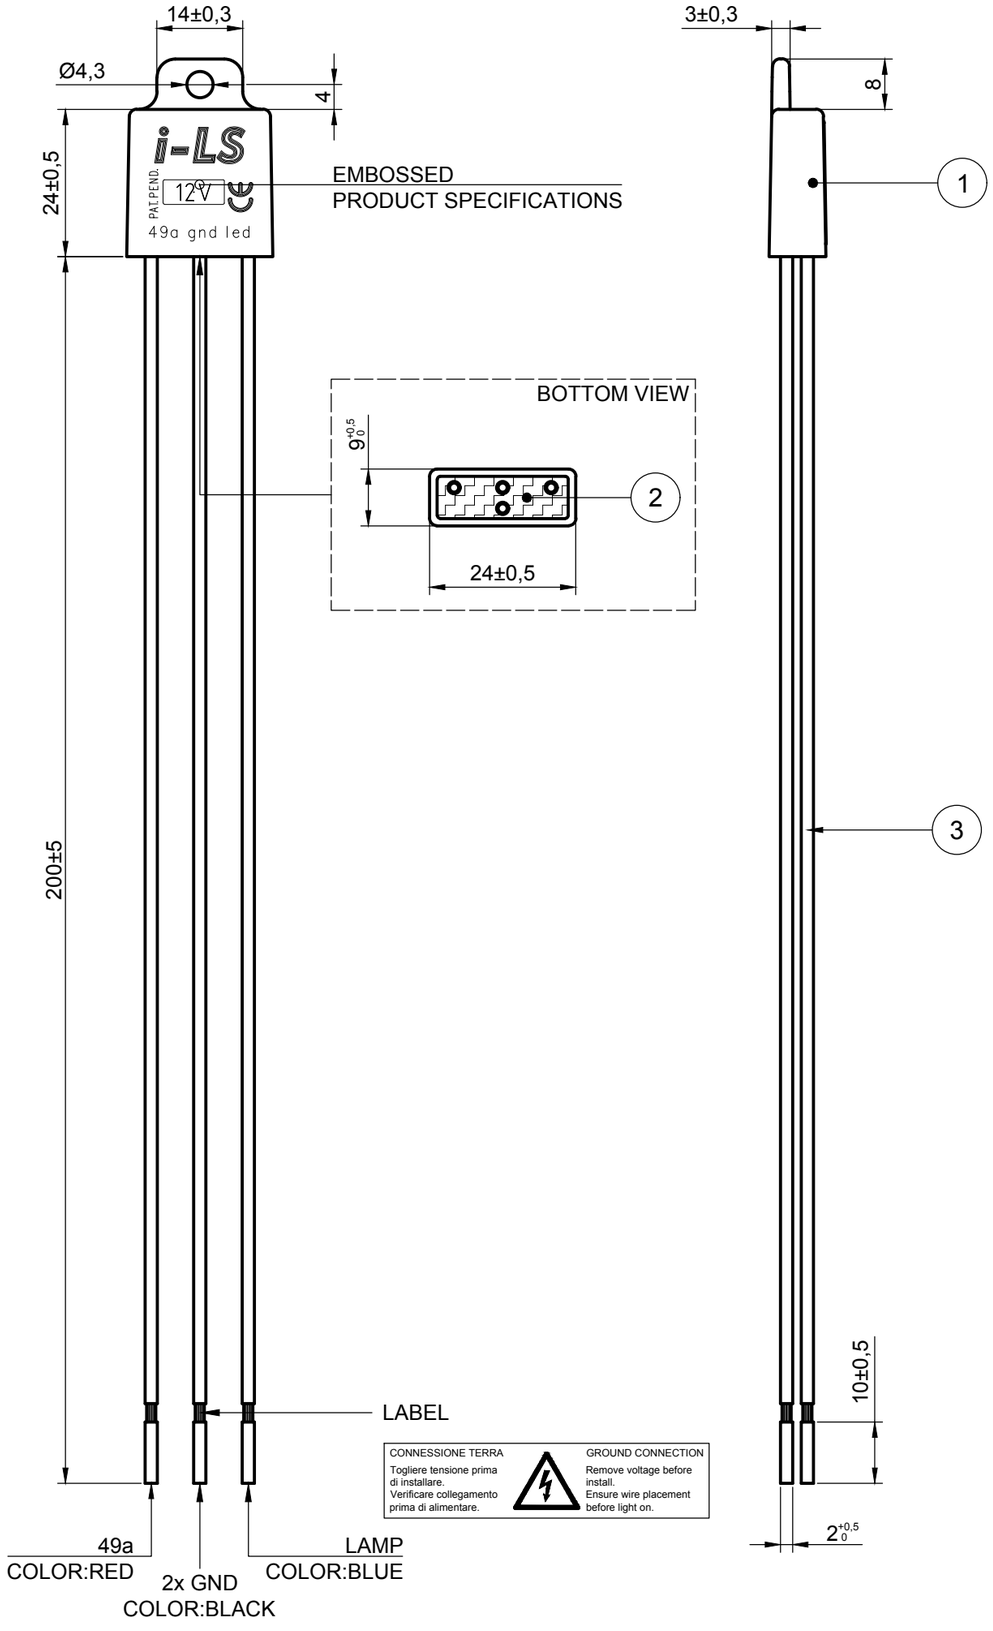


TECHNICAL CHARACTERISTICS

RATED VOLTAGE	12V DC
OPERATING VOLTAGE	10V - 15V
DIRECTION INDICATOR RANGE POWER RATING	MIN. 1W AT 10V - MAX 8W AT 15V
OPERATING TEMPERATURE	- 40°C ... +80°C
LIFETIME	200 hours
PROTECTION INDEX	IP65
WEIGHT	12g

MATERIALS


PART ID:	MATERIAL:	FINISH/ COLOR:
1	PA66	YELLOW
2	RESIN COMPOUND	BLACK
3	PVC/ COPPER	1x1mm² T2 300V DC 105°C

REFERENCE STANDARDS

ISO 13207 - "LED LAMP CHARACTERISTICS FOR BULB COMPATIBLE FAILURE DETECTION
PART 1: LED LAMPS USED AS DIRECTION INDICATORS"

e24 EMC ECE R10

CONNECTION

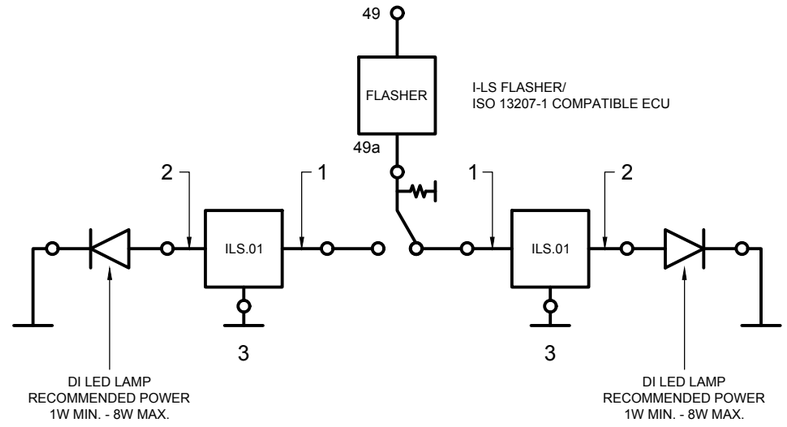

REV. N°	DESCRIPTION	DATE	DWN	APVD
-	-	-	-	-
A	-	07/04/2015	M.NARDI	M.TESSARO

REVISIONS

DRAWN	DATE	CHECKED	DATE	GENERAL TOLERANCES FOR LINEAR AND ANGULAR DIMENSIONS ACCORDING TO ISO 2768
M.NARDI	07/04/2015	M.TESSARO	07/04/2015	

DESCRIPTION	SCALE
I-LS LAMP MODULE 12V	1:1

PART NUMBER	REV.	SHEET	SIZE
MOD-BG.LEDiLS	A	1/1	A3

BY TERMS OF LAW IS STRICTLY FORBIDDEN TO COPY OR COMMUNICATE TO THIRD THE CONTENT OF THIS DRAWING

Datasheets and all specifications are subject to change without notice.