

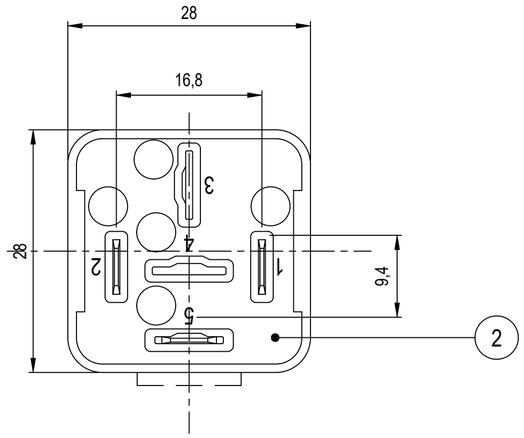


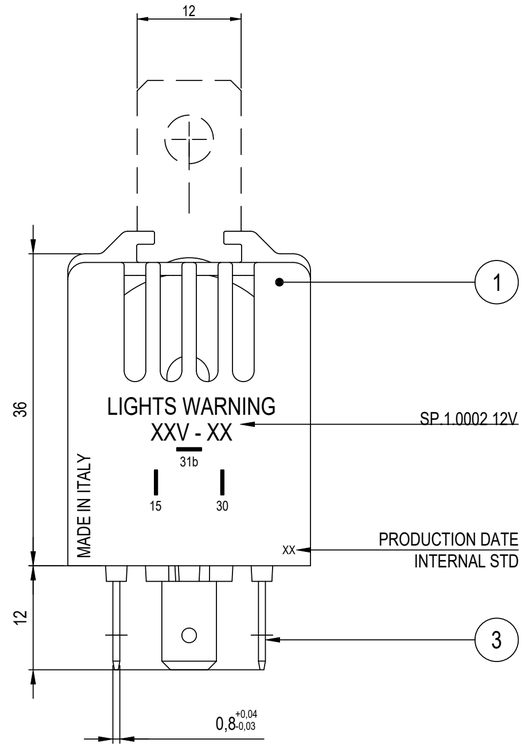

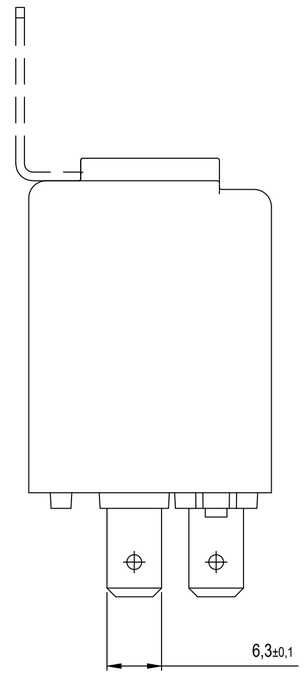


TECHNICAL CHARACTERISTICS

PART NUMBER	06.203.02	06.403.02
RATED VOLTAGE	12V DC	24V DC
OPERATING VOLTAGE	10V DC ÷ 15V DC	20V DC ÷ 30V DC
OPERATE VOLTAGE	≤ 10V DC	≤ 20V DC
TEST VOLTAGE	(13 ± 0,2)V DC	(26 ± 0,2)V DC
SOUND WAVE FREQUENCY	4000 Hz	
SOUND INTENSITY	85dB @ rated voltage @ 10cm @ free field	
PULSE FREQUENCY	(95 ± 12%) times / min	
OPERATING TEMPERATURE	- 40°C ÷ 85°C	
STORAGE TEMPERATURE	÷ 110°C for 2h	
LIFETIME	100 h CONTINUOUSLY	
PROTECTION INDEX	IP54	

MATERIALS

N.	ELEMENT	MATERIAL	TREATMENT	COLOUR	NOTE
1	CASE	PA 6,6 GF30	-	BLACK	-
2	BASEPLATE	PA 6,6 GF30	-	BLACK	-
3	TERMINAL	CuZn37	Sn 5µm	-	ACCORDING TO ISO 7588 AND ISO 8092-1

WIRING DIAGRAM

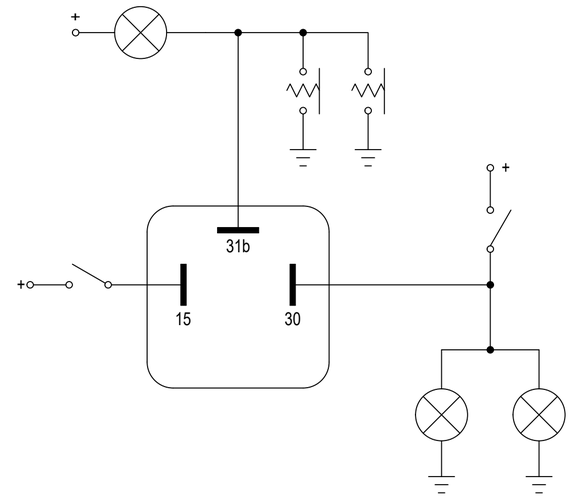

REVISIONS				
REV.	DESCRIPTION	DATE	DRAWN	APPROVED
0	TECHNICAL DRAWING REPLACES EXISTING DATASHEET NEW BUZZER LOUDITY LD-BZPG-2412 UPDATED PULSE FREQUENCY (95±12%) TIMES/MIN.	25/06/2020		

DRAWN	DATE	CHECKED	DATE	REV.	General tolerances, see ISO 2768 -mH.	
M. TRENTO	25/06/2020		25/06/2020	0		
CVEP		PART NAME			WEIGHT	SCALE
		LIGHTS WARNING TIPE 02			20 g	2 : 1
		PART NUMBERS			SHEET	SIZE
	mm DIMENSIONS	06.x03.02			1 / 1	A2

ALL PROPRIETARY RIGHTS RESERVED BY AUTOELETTRIC S.R.L. THIS DRAWING SHALL NOT BE REPRODUCED OR IN ANY WAY UTILIZED TO MAKE COMPONENTS AND IT MUST NOT BE RELEASED TO OTHER PARTIES WITHOUT WRITTEN CONSENT. THE COMPANY ASSERTS ONE'S RIGHTS ACCORDING TO THE LAW.