
10A changeover relay

10A changeover relay for universal applications, such as signal switching or low-power loads. It is designed for integration in harsh environments, like agricultural or construction machinery, on external wiring harnesses. With the optional mounting bracket (ZUB000086), installation is simple and convenient.


Technische Daten

Rated voltage	12V
Operating voltage	9 – 15V
Continuous current	13A @ 20°C (NO) 10A @ 20°C (NC)
Operating temperature	-40 - +85 °C
Circuit	Changeover contact
Weight	~45g
Protection Circuit	Parallel freewheeling diode
Dimension	30x30x50.8mm
Power Consumtion	Approx. 600 mW (on)
Relay	Type CVEP MADS112
Connector	DTF13-6P compatible
Mounting	Optional bracket
Coil polarity	Pin 1 + | Pin 2 -

Dimension

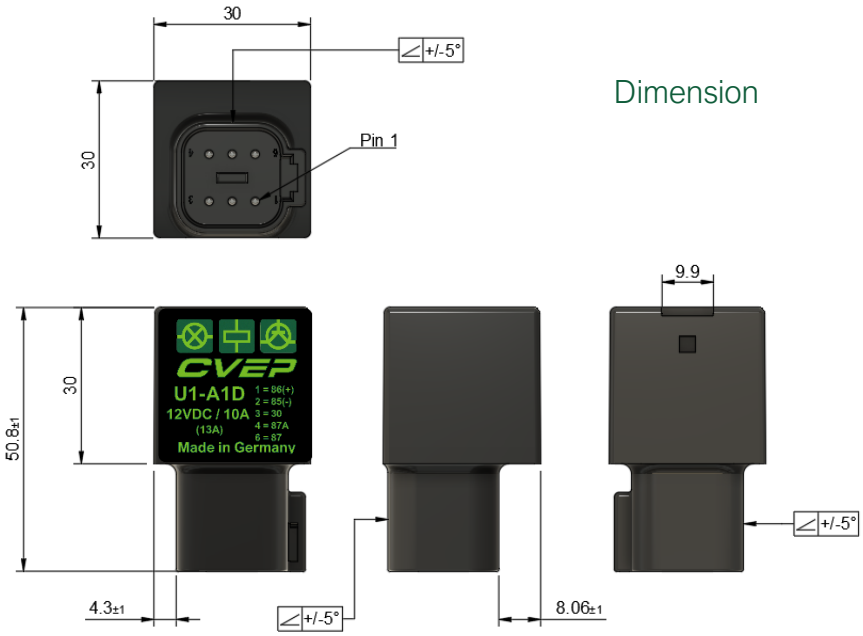

Connection

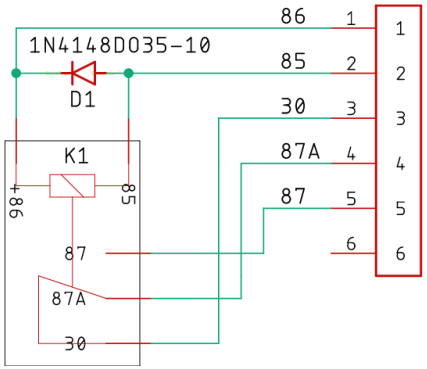

Materials

Potting	Peters VU 4444/31
Housing	PA6 GF

Create:	BB	Date:	02.06.2025
Check:		Version:	V1

10A/13A changeover relay	U1-A1D-001

CVEP GmbH – Gewerbegebiet Ost 35 – 92353 Postbauer-Heng / Phone: +49-9188-30582-33 email: info@cvep.de Web: www.cvep.de