2A changeover relay


2A changeover relay for low-current applications, such as signal switching or low-power loads. It is designed for integration in harsh environments, like agricultural or construction machinery, on external wiring harnesses. With the optional mounting bracket (ZUB000084), installation is simple and convenient.

Technische Daten


Rated voltage	12V
Operating voltage	9 – 24V*
Continuous current	2A @ 20°C
Operating temperature	-40 - +85 °C
Circuit	Changeover contact
Weight	~45g
Protection Circuit	Parallel coil resistor
Dimension	30x30x48,3mm
Power Consumtion	Approx. 350 mW
Relay	Type V23079 (Tyco 1-1393788-1)
IP rateing	IP67
Connector	DTF13-6P compatible
Mounting	Optional with plug in lug
Coil polarity	Pin 1 = + | Pin 6 = GND

* Do not use in 24V Systems.

Dimension

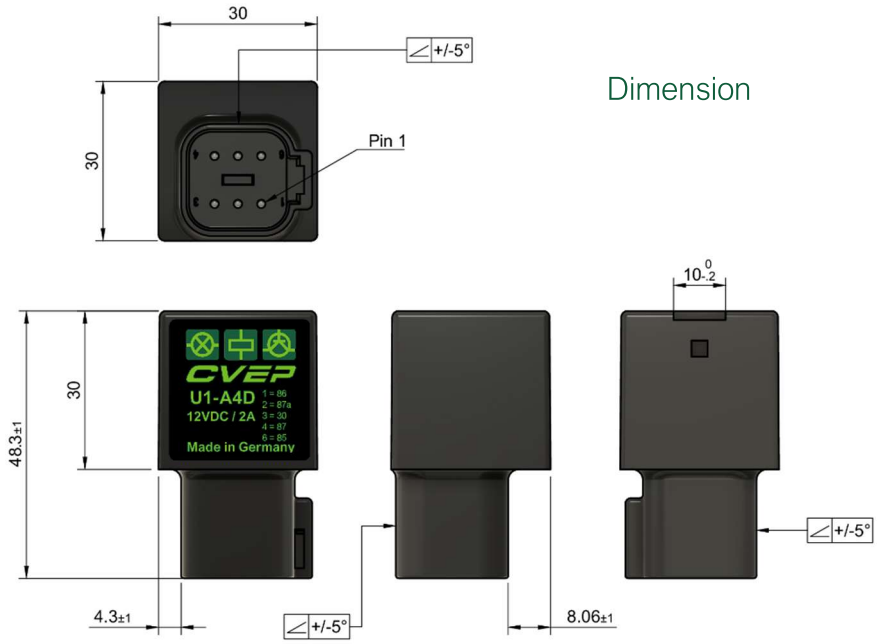

Connection

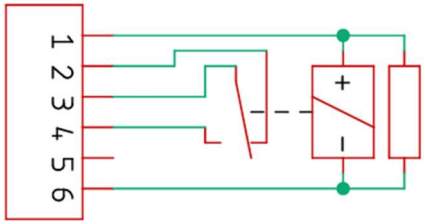

Materials

Potting compound	Polyuretane resin
Housing	PA6 GF30

Create:	BB	Date:	06.03.2026
Check:		Version:	V4

2A changeover relay	U1-A4D-001

CVEP GmbH – Gewerbegebiet Ost 35 – 92353 Postbauer-Heng / Phone: +49-9188-30582-33 email: info@cvep.de Web: www.cvep.de